


ALARM CABLE SHIELDED



INOCAB-CE

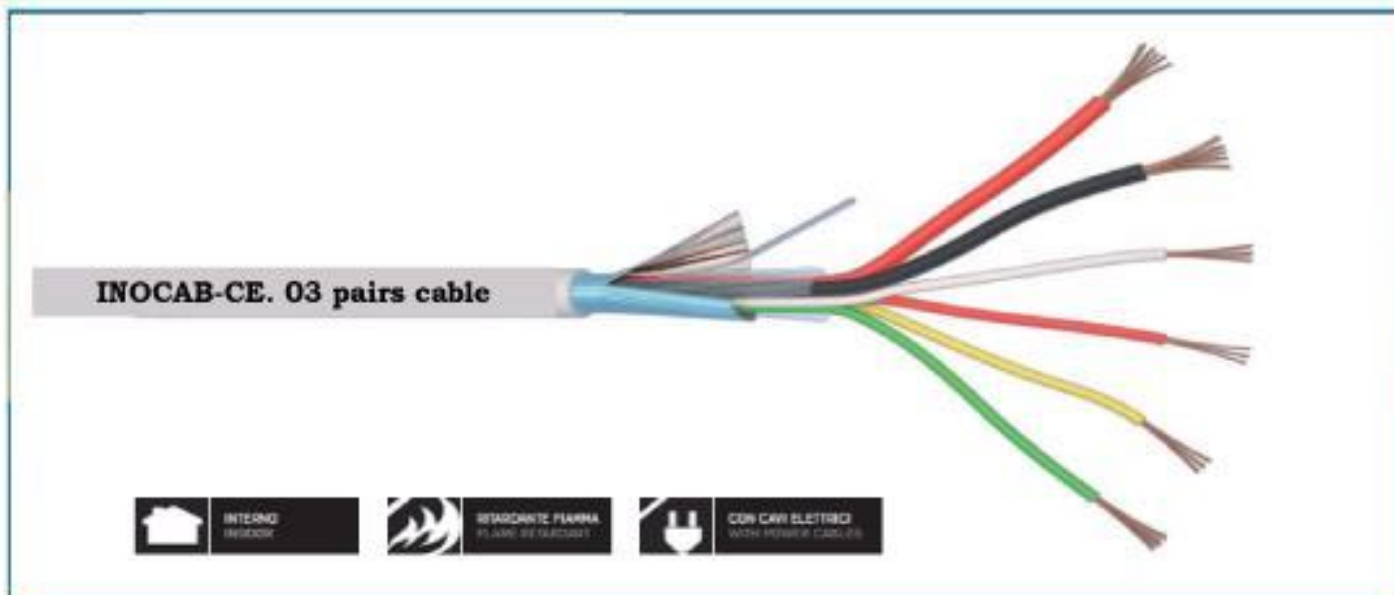

PRODUCTS INFORMATIONS

CHARACTERISTICS

Applications:

fire-safety or hot environment cabling, transmission of low currents, telephone, link-ups, remote monitoring and remote control

Screen:

Drain wire+Aluminium/polyester tape shield

Sheath colour:

Orange

Max operating temperature:

90 °C on the conductor

Minimum bending radius:

10 X Diameter

Rated voltage U₀/U:

100/170 V

Max. temperature in case of short circuit:

350 °C on the conductor

Nominal size mm ²	Number of conductors mm	Enveloppe isolante mm	Sheath thickness mm	Nominal outer diameter mm	Nominal weight Kg /Km
3 Pair/3 Paire	3x2*7/0.19+1*7/0.19	0.5	0.7	5.3	28.1